

FIG.3

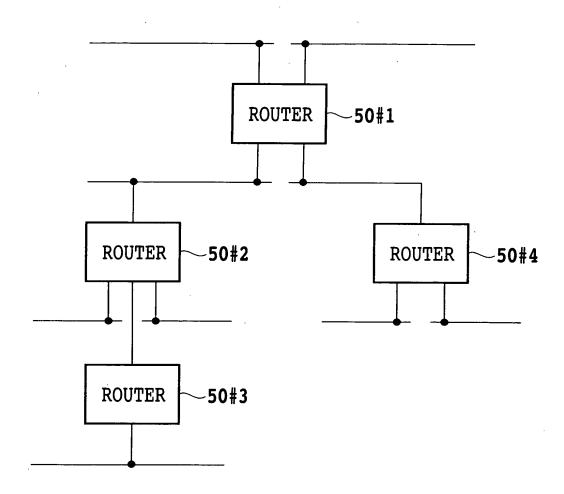


FIG.4




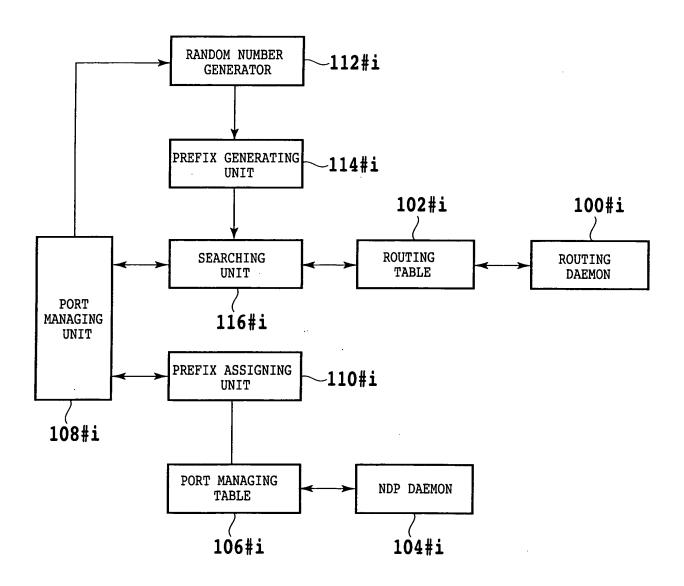


FIG.5

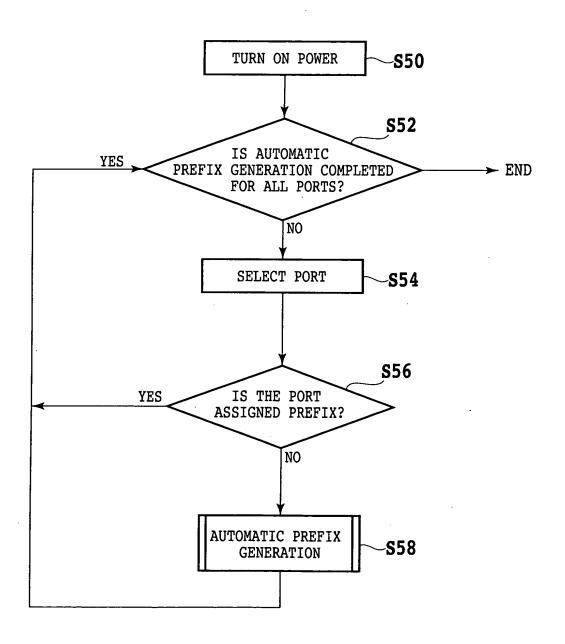


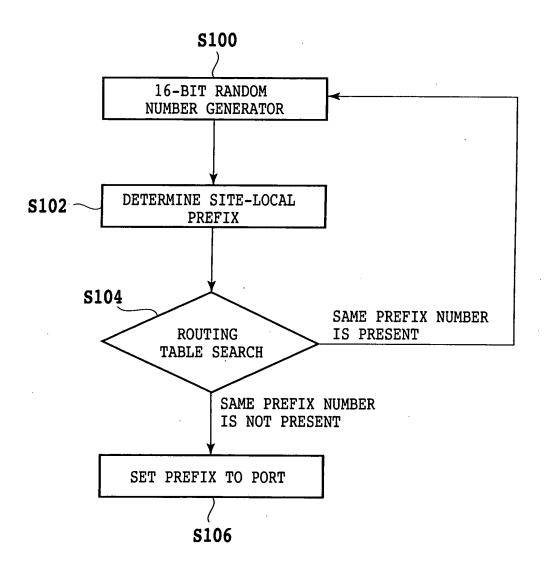

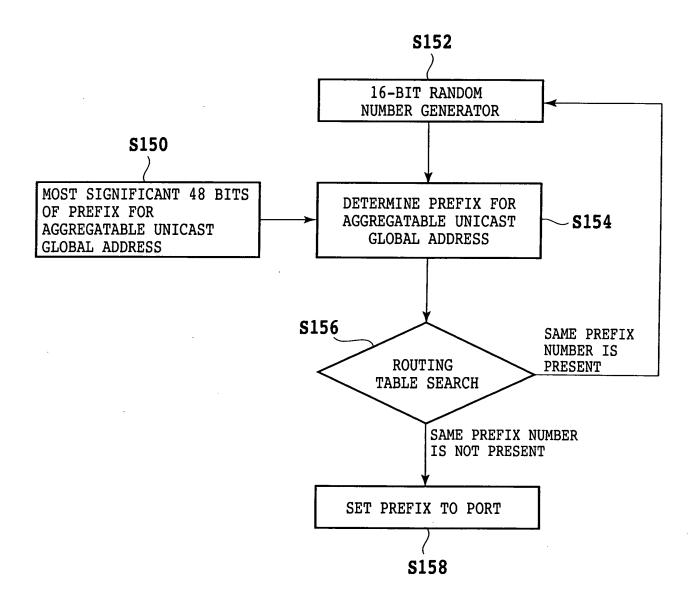

| | |
|---|-------------------|
| 64 bit | SLA interface ID |
| _ | |
| 16 | |
| } | |
| 24 | RES NLA ID |
| 8 24 | RES |
| 13 | TLA |
| = | • |

| _ | |
|---------|---------------------------|
| 64 bits | interface ID |
| 16 bits | subnet ID |
| 38 bits | 1111111111 0 subnet ID |
| 10 bits | 1111111011 |

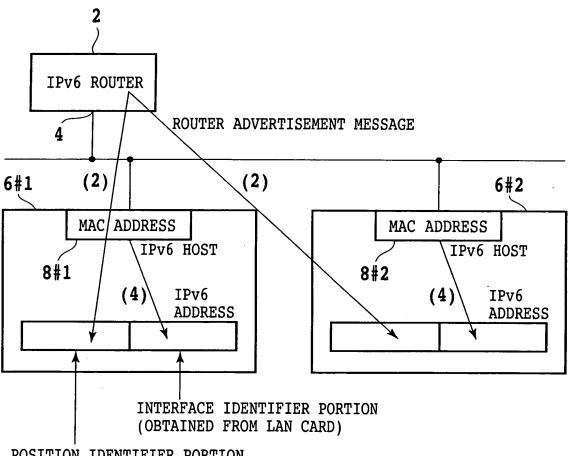

POSITION IDENTIFIER PORTION (OBTAINED FROM ROUTER)